


2630 Amperometric Free Chlorine Electrode

Chlorine:

- Embedded memory chip accessible via the 9950-3 Chlorine Controller
- Quick assembly with Signet's patented DryLoc® connector
- Integrated temperature element for automatic temperature compensation
- Separate drive electronics (2650 Electronics) for easy servicing and electrode replacement

MFR #	Body	Operating Range	Description	Code
3-2630-1	PVC-C	0.02-2 ppm	Free Chlorine electrode, 0.02 to 2 ppm (mg/l)	159 001 746
3-2630-2	PVC-C	0.05-5 ppm	Free Chlorine electrode, 0.05 to 5 ppm (mg/l)	159 001 662
3-2630-3	PVC-C	0.1-20 ppm	Free Chlorine electrode, 0.1 to 20 ppm (mg/l)	159 001 747

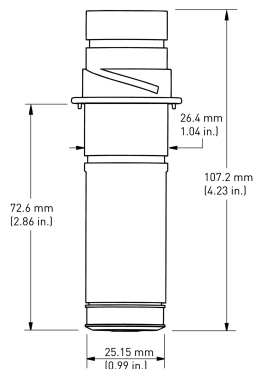

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>