


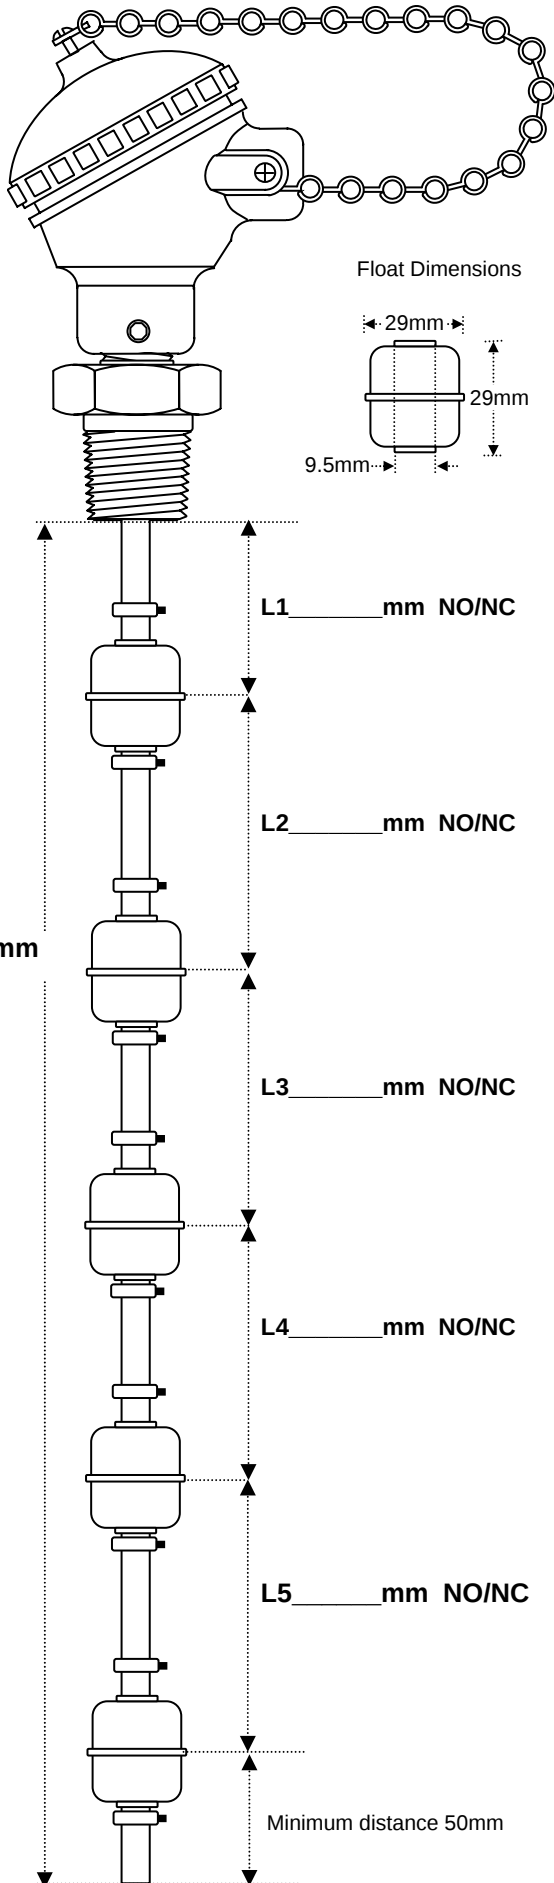

Multi-Float Level Switch Option Selection Guide – small float

1. Process fluid: _____

2. No. of floats required _____

3. Please indicate **distance** between floats and **switch positions** (NO/NC) on drawing.

4. Please choose a **process connection** or indicate custom connection below.

1" BSP/T

1" BSP/P

1" NPT

1" Table D Flange

1" ANSI 150# Flange

Custom: _____

5. Please Circle or note custom **termination** below.

*Small heads used only on 1 & 2 float switches

Large Alloy Head

Flying Leads

Large 316SS Head

Large Bakelite Head

Small Alloy Head*

Small Bakelite Head*

Explosion-Proof Head

Custom: _____

Specifications

- **Max. "L" length:** 1800mm contact Henco for other options.
- **Min. distance:** between floats is 45mm.
- **Contacts:** may be isolated or common please specify.
- **Min. Specific Gravity:** 0.8 contact Henco for other options.
- **Max. Temperature:** 120°C.
- **Max. Pressure:** 10BAR / 150PSI
- **Connection & Stem material:** 316SS
- **Float material:** 304SS contact Henco for Polypropylene options for corrosive applications.
- **Internal Reed Switches:** rated 250VAC/DC @ 500mA. Use external relays when switching a load.

Customer signature required for go ahead:

Hinco Instruments Pty Ltd

5/52 Vinnicombe Drive, Canning Vale WA 6155 Ph: 08 9455 6777 Fax: 08 9455 7711

Email: frontdesk@hinco.com.au Website: www.hinco.com.au

Description: Level Switch Selection Guide

Drawing No:

Size: A4

Scale: NTS

Drawing By: AF